

MADE IN THE U.S.A.

OPERATORS AND PARTS MANUAL GAS GREENS ROLLER - MODEL HP11



MANUFACTURER OF OUTDOOR POWER EQUIPMENT

Products for Turf & Lawncare, Rental, Construction, Tree care, Wood Processing, Nursery & Farm Industries
Other Salsco Equipment

3-1/2" - 18", Gas, Diesel, and P.T.O, Wood/Brush Chippers Chipper Shredder Vacuums - Tailgate & Truckloader Vacuums Sidewalk/Golf Cart Paving Machines - Gas and Electric Greens Rollers

Quality of Workmanship, Innovative Design, Built to Last!

105 School House Road Cheshire, CT 06410 U.S.A. 800-872-5726, 203-271-1682, 203-271-2596 (Fax) sales@salsco.com, www.salsco.com

TABLE OF CONTENTS

MODEL HP11, GAS GREENS ROLLER

COVER & TABLE OF CONTENTS	Pages 1 – 2
STATEMENT OF FACT	Page 3
SPECIFICATIONS & FEATURES	Page 4
MACHINE REGISTRATION	Page 5
SAFETY & OPERATING INSTRUCTIONS	Page 6
SERVICE & MAINTENANCE INSTRUCTIONS	Page 7
PARTS DIAGRAMS	Pages 8 – 25
TORQUE CHARTS	Page 26
WARRANTY POLICY/PROCEDURE	Page 27
COPY OF WARRANTY CLAIM FORM	Page 28
COPY OF DEALER DELIVERY REPORT & WARRANTY CARD	Page 29
SERVICE SCHEDULE LOG	Page 30

SALSCO, INC. 105 School House Road Cheshire, CT 06410 800-872-5726, 203-271-1682 203-271-2596 (Fax) www.salsco.com, sales@salsco.com

STATEMENT OF FACT

You have just purchased the highest quality, most maneuverable, dependable, **GREENS ROLLER** on the market today. This unit has the ability to meet exact standards and perform for years with minimum downtime. HOWEVER, it cannot read nor will it understand this manual no matter how long you leave it on top of the machine.

It is your responsibility to read and understand this manual; it is also your responsibility to be certain this information is passed along to anyone who is expected to operate this equipment. Should you choose not to read, understand and pass along the information provided you, please expect equipment failure and possible injuries to persons around this equipment.

For the safety of the operator, it is **imperative** that this manual is carefully read and understood.

Once you have read this manual, it is your responsibility to be sure that all new operators read and understand this manual, especially all cautions stated.

As a manufacturer of equipment, we have a responsibility to design a safe piece of equipment. NOTE: The important safeguards and instructions in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution, and care are factors, which cannot be built into any product. These factors must be supplied by the person(s) caring for and operating this equipment.

ONLY YOU CAN PREVENT ACCIDENTS!!

SPECIFICATIONS AND FEATURES GAS GREENS ROLLER - MODEL HP11

The Salsco Greens Roller is actually a multi-purpose tool, which, in a short time, has become a must-have for many golf courses. Our unit can be used on GREENS, WET OR DRY, and will increase speed an average of 1-2 feet. However, that's only part of the story. We can ROLL SOD, CLAY TENNIS COURTS, CART PATHS, SUB BASE FOR NEW GREENS CONSTRUCTION, WET GREENS, WET SPOTS ON FAIRWAYS, etc., etc. Because of traction and maneuverability this machine is ready and able when you are.

Drive System

A 13HP Honda Engine, electric start, powers this unit. Power is delivered to a Hydrostatic Pump through a love-joy coupling. Fluid power is then transmitted through 2,500 P.S.I. (10,000-lb. burst) hoses to drive motors. Drive motors change fluid power to mechanical power and transmit it through #50 chain to the rolls. We drive both 10-3/4" diameter rolls. This gives us the best traction in the roller business. Compaction is not an issue at 5.4 P.S.I. (a 200 lb. person = 12.5 P.S.I.)

Compaction is Never a Problem

5.4 P.S.I. puts compaction at the lowest possible level. We want to smooth out the surface, not change it or compact it. Both rollers can be filled with water which will add approximately 128 lbs. and 1.4 P.S.I. to the already 5.4 P.S.I. = 6.8 P.S.I. for rolling out frost heaves, tees or after verti-draining.

The Salsco Roller is very user friendly, with automotive type steering and smooth pedal controls. Operators spend very little time getting comfortable with this machine, usually before the first green is done.

The Salsco Greens Roller comes standard with its own trailer. When not in use with the Greens Roller, it can be used for many other tasks. An example would be for transporting greens mowers from green to green.

03/2011

MACHINE REGISTRATION

SALSCO, INC. 105 School House Rd., Cheshire, CT 06410 800-872-5726, 203-271-1682, 203-271-2596 (Fax) sales@salsco.com www.salsco.com
MODEL HP11 - GAS GREENS ROLLER
scontinue, add improvements to, or change the design of nout obligation to improve existing machines, either by rts.
e policy of SALSCO to update existing machines at its own lesigns will be made in such a way that they can be "Retro
ne model and serial number of this unit. Please retain these
THOUT MODEL NUMBERS OR PART NUMBERS.
Model Number
ranty card. This will insure immediate processing of any

READ AND UNDERSTAND THIS MANUAL BEFORE STARTING MACHINE

03/2011

SAFETY INSTRUCTIONS

- 1. **NEVER** leave unit running while unattended.
- 2. **NEVER** park on a green for any reason.
- 3. **NEVER** go down steep hills sideways. **ALWAYS** approach hills straight on.
- 4. **NEVER** change your mind mid-way down a steep incline. Once you've started down a steep incline, change direction only with the greatest of care and gentlest touch.
- 5. Allow engine to cool for several minutes before filling with fuel, since fuel tank is over the engine.

NOTE: HONDA ENGINES - ALWAYS TURN OFF THE FUEL SHUTOFF, WHEN THE ENGINE IS NOT RUNNING, i.e. WHEN IN TRANSPORT, STORAGE, ETC.

OPERATING INSTRUCTIONS

- 1. Check that the unit has been serviced and all fluids are checked and topped off.
- 2. Check all hydraulic hose fittings.
- 3. Push fuel shut off switch to on position.
- 4. Push choke to full on position
- 5. Push throttle to just above idle.
- 6. Turn on/off switch to on position.
- 7. You should start engine from seat position. Just reach down to engine controls. Keep feet off pedals. Hydrostatic drive should come to neutral when engine starts.
- 8. Pull rope and engine will come to life. Hydrostatic transmission should come to neutral when engine is started. REMEMBER: RIGHT PEDAL TO GO RIGHT, LEFT PEDAL TO GO LEFT.
- 9. Slide choke to full off position.
- 10. Once unit is running at just above idle, push pedal down slowly. Unit will begin to move. Drive it out of trailer on to grass area.
- 11. Since the unit is hydrostatic, engine should run at full R.P.M. and speed should be controlled by pressure on the pedal.

HINTS:


- 1. **KEEP BOTH FEET ON PEDALS AT ALL TIMES.** By keeping your heels planted and moving your toes to change direction, you have smooth control left to right.
- 2. If you roll the same direction as green was mowed, it's easy to follow the lines. This helps a new operator do a fine job sooner.
- 3. To insure longer life to your unit, when changing direction do so smoothly.


03/2011

SERVICE & MAINTENANCE INSTRUCTIONS


- 1. Check all hydraulic hoses **DAILY**, **or before each scheduled use**, for wear and any signs of chaffing. **REMINDER:** Drive motor hoses should be treated as wear items and should be replaced on a yearly basis.
- 2. Check all fittings for any signs of leaking **DAILY**, or before each scheduled use.
- 3. Check all grease fittings as listed below on a **WEEKLY** basis, and grease as necessary. (Add grease till grease leaks slightly from fitting.)
- ♦ Bearings on roll housings Quantity 4
- Pivot bearing on main housing Quantity 2
- ♦ U-Joint on steering shaft Quantity 1
- 4. Check engine to manufacturers specifications and maintenance. THIS ENGINE HAS AN OIL SHUT OFF SWITCH. CHECK OIL LEVEL FREQUENTLY AS THE UNIT WILL STALL ON INCLINES IF OIL LEVEL IS LOW.
- 5. Fill hydraulic tank to 4-6" below filler cap. Be sure to tighten cap till cap seals.
- 6. After approximately **1 WEEK** of use, **and then every 2 WEEKS thereafter**, check drive chains one on each side on roller drive motor. Pivot motor to tighten chain. **NOTE:** Check and adjust the tension of both drive motor chains on a regular basis. If chains are not tight, this could cause severe sprocket wear and possible breakage.
- 7. After approximately **1 WEEK** of use, **and then every 2 WEEKS thereafter**, check chains on steering. Adjust as needed.
- 8. Pivot for articulating steering should be tight, **with no play,** much the same as wheel bearings on cars.
- 9. **Keep unit clean**. Should rust form on rolls, simply drive the unit on a rough area till rolls are clean.
- 10. **Oil & Filter Type** It has been determined that your Salsco machine will perform better by using a 25 micron filter. Salsco recommends using Mobil DTE 26 or Citgo HYD 68, non-detergent hydraulic oil, or their equivalents. The oil should have a viscosity rating of at least 100 SSU. While this is not a necessity, it will improve the overall performance of your machine. Salsco is now using this filter and hydraulic oil on all our machines using hydraulics.


SAFETY IS A PRIME CONCERN AT SALSCO AND THE SAFETY DECALS ON YOUR MACHINE ARE A HIGHLY VISIBLE AND CONSTANT REMINDER TO ALL OPERATORS. REPLACEMENT SAFETY DECALS MAY BE OBTAINED BY CALLING SALSCO @ 1-800-872-5726, OR THE DEALER IN YOUR AREA.

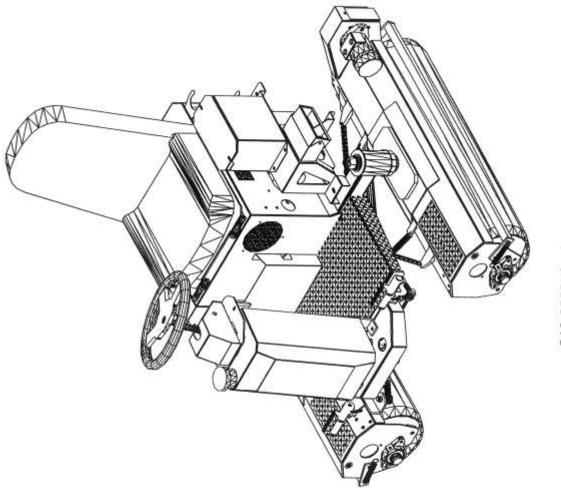


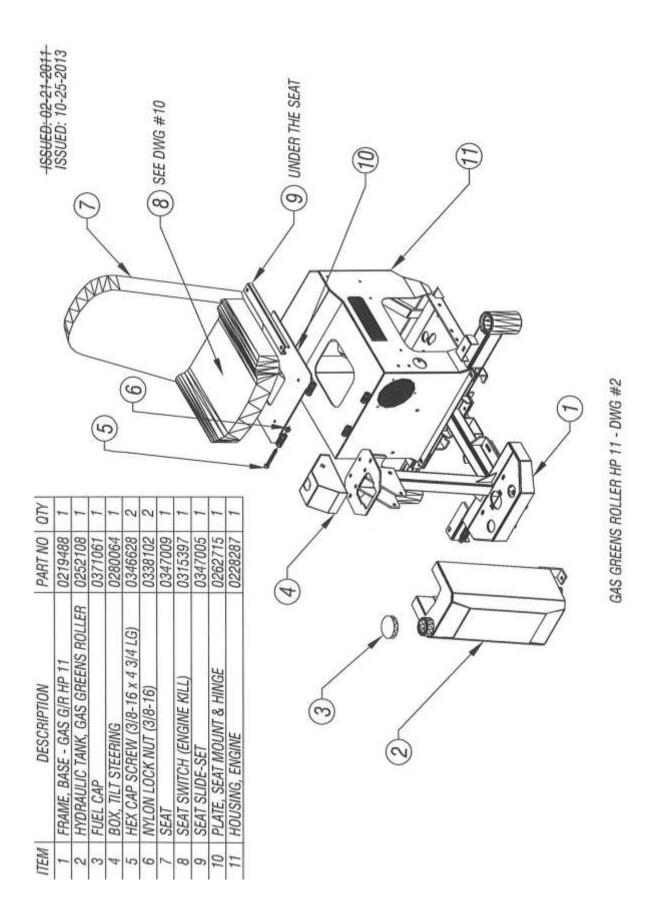


O:\Manuals\G.G.R. HP11\GGR_HP11_PW_11.7.13.doc - 9 -

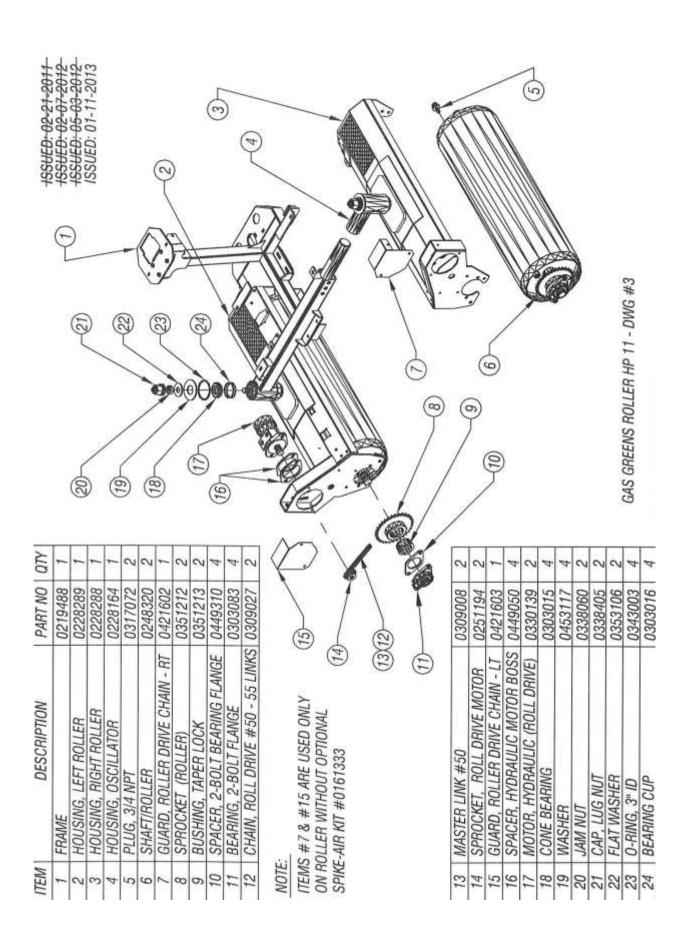

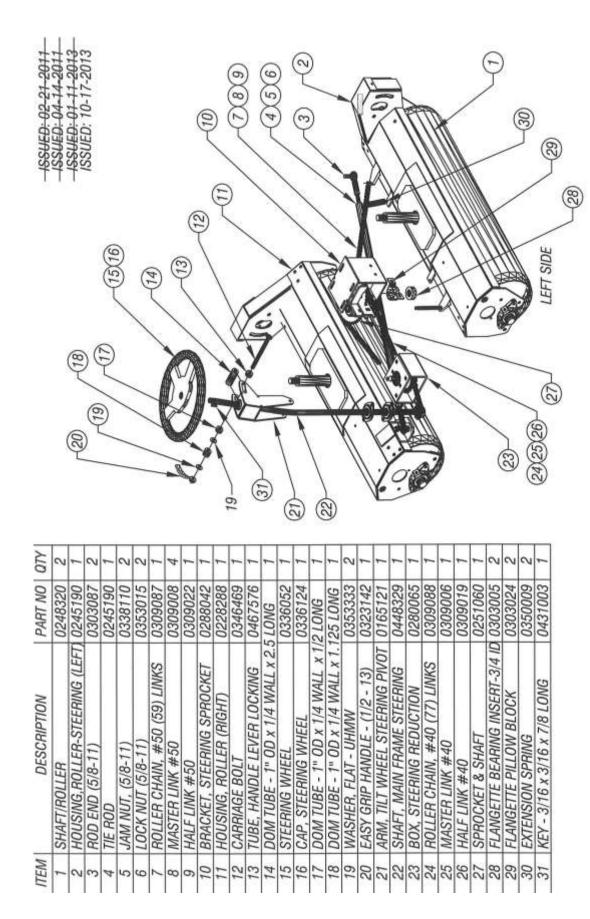


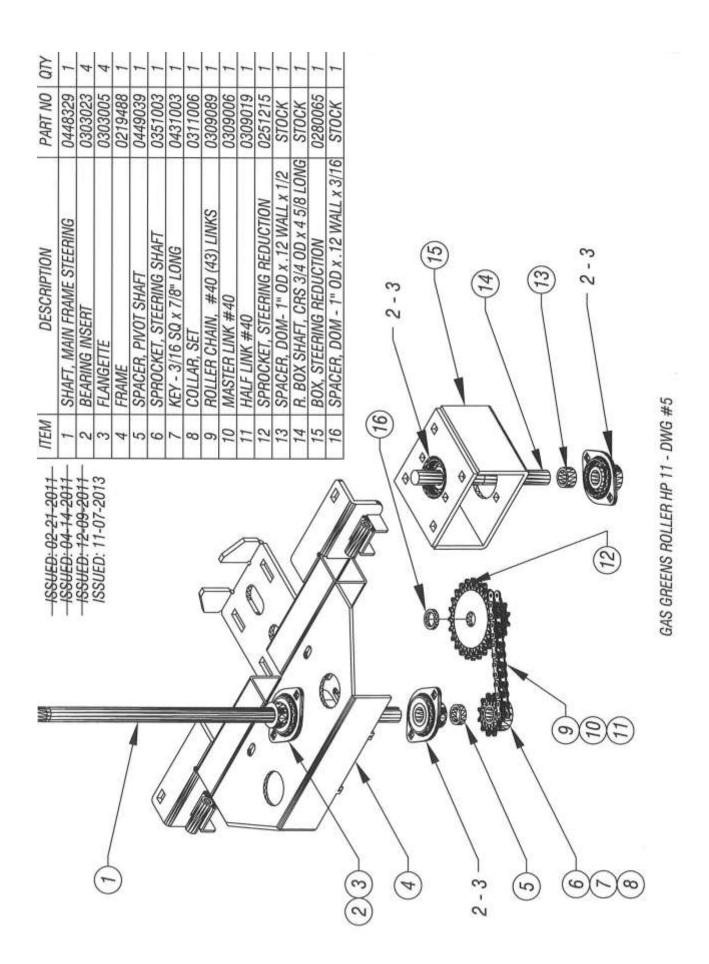



O:\Manuals\G.G.R. HP11\GGR_HP11_PW_11.7.13.doc

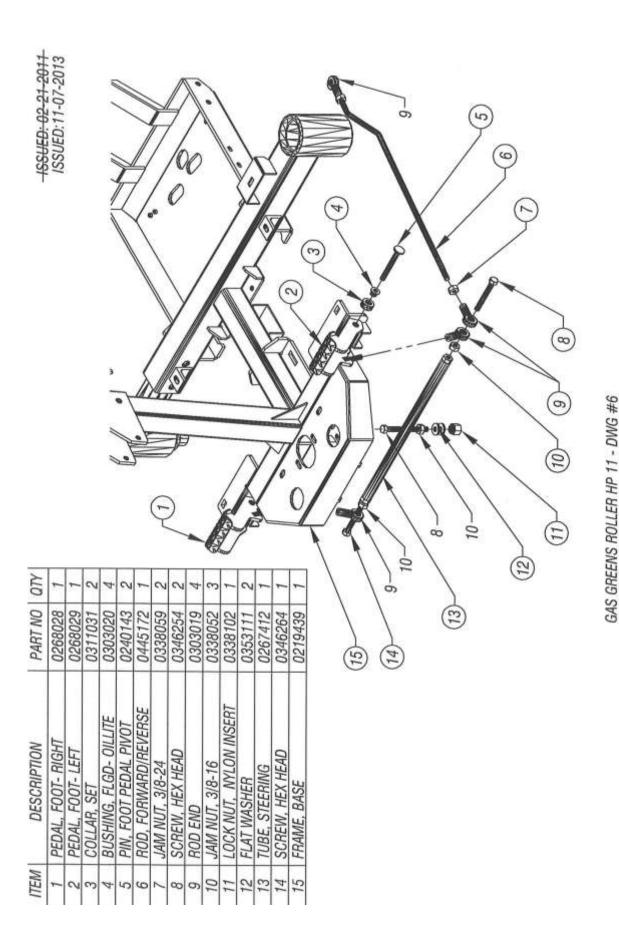


 $O:\Manuals\G.G.R.\ HP11\GGR_HP11_PW_11.7.13.doc\\ -13\ -$

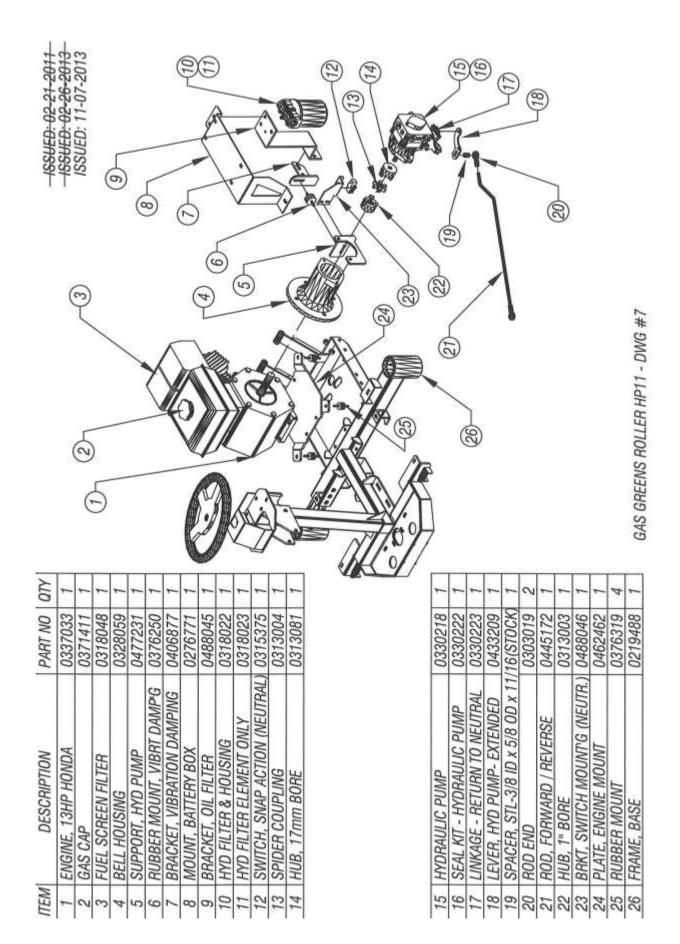


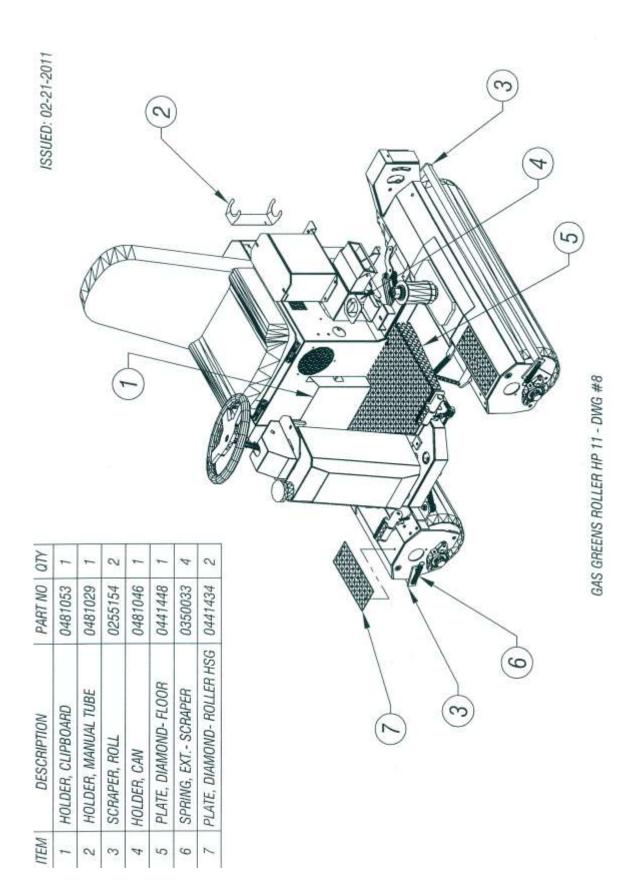

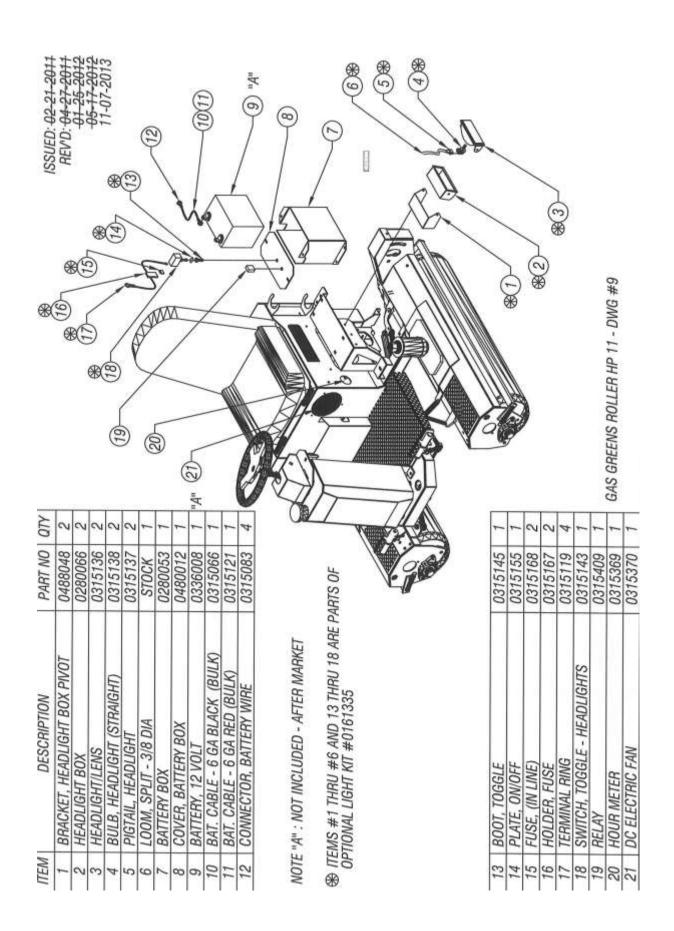


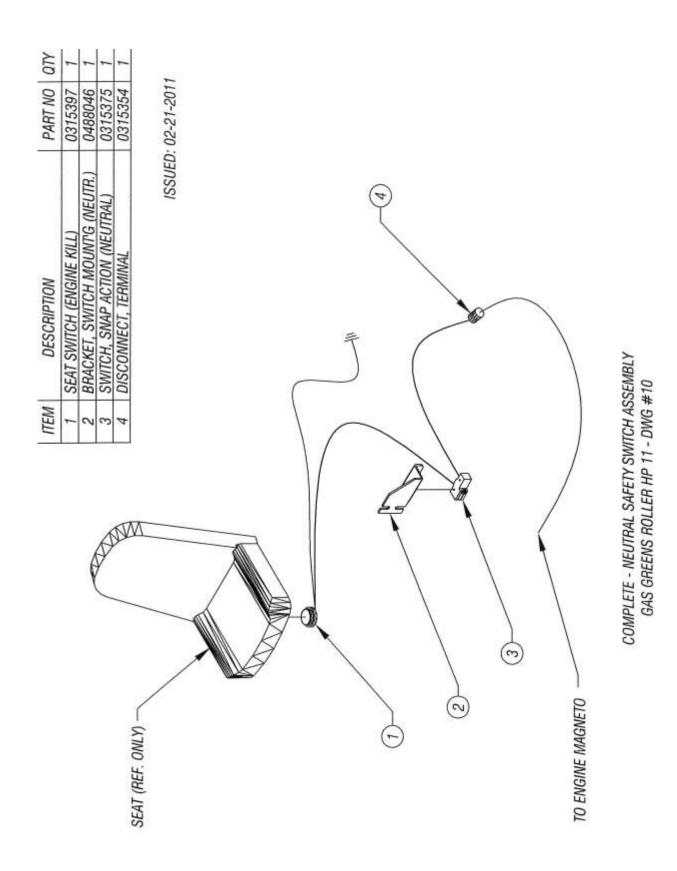


O:\Manuals\G.G.R. HP11\GGR_HP11_PW_11.7.13.doc - 17 -

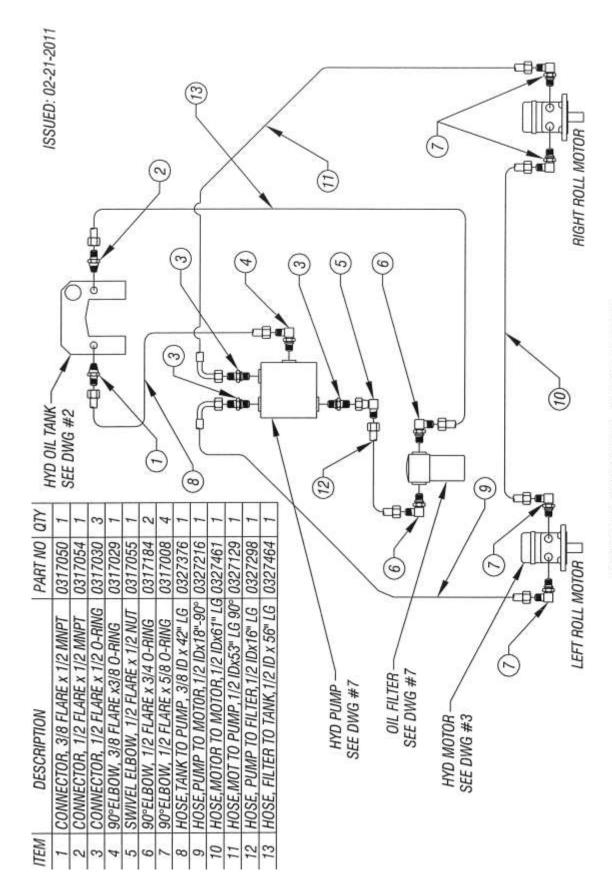


HYDRAULIC COMPONENTS, FITTINGS & HOSES GAS GREENS ROLLER HP 11 - DWG #11

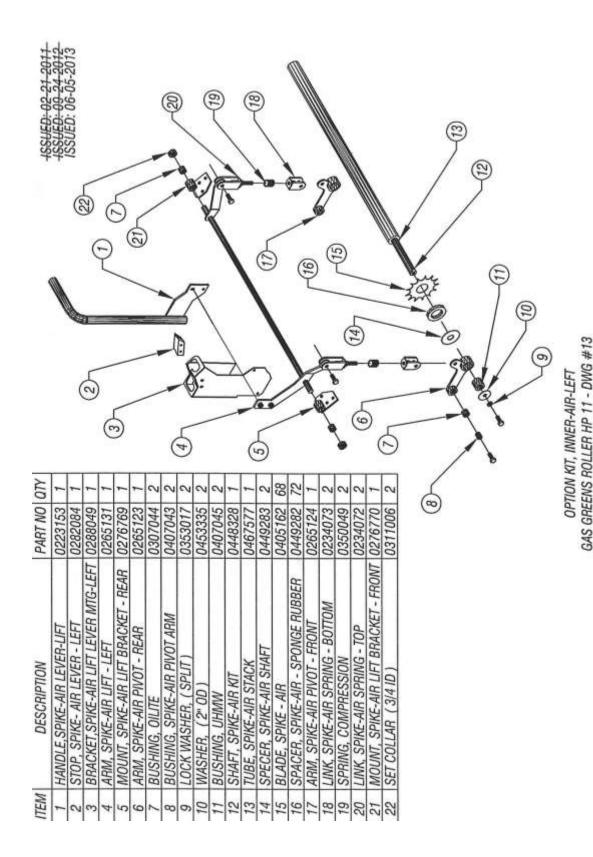



 $O:\Manuals\G.G.R.\ HP11\GGR_HP11_PW_11.7.13.doc\\ -20\ -$

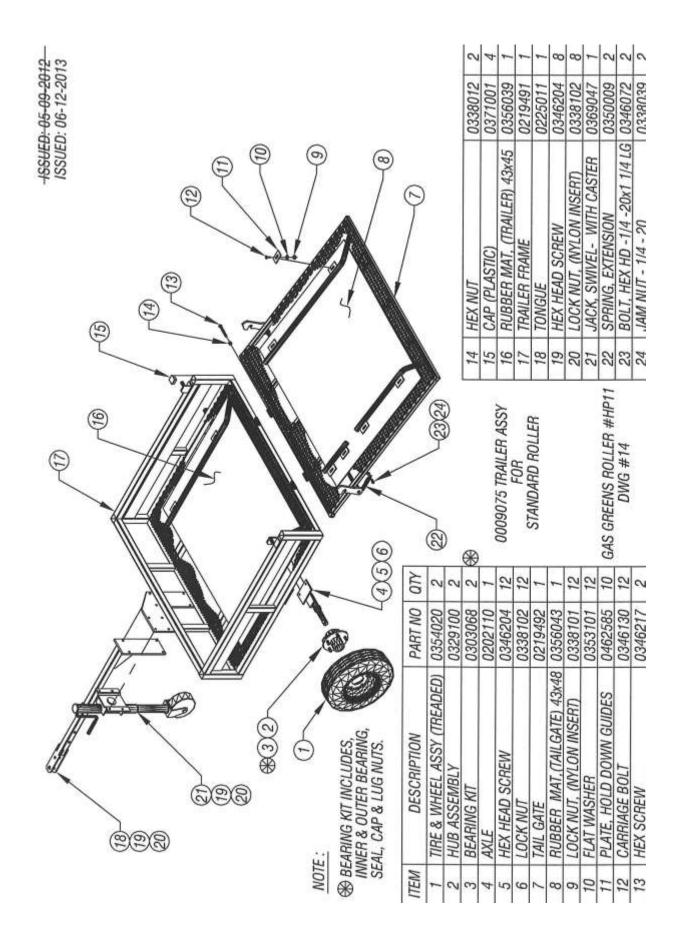

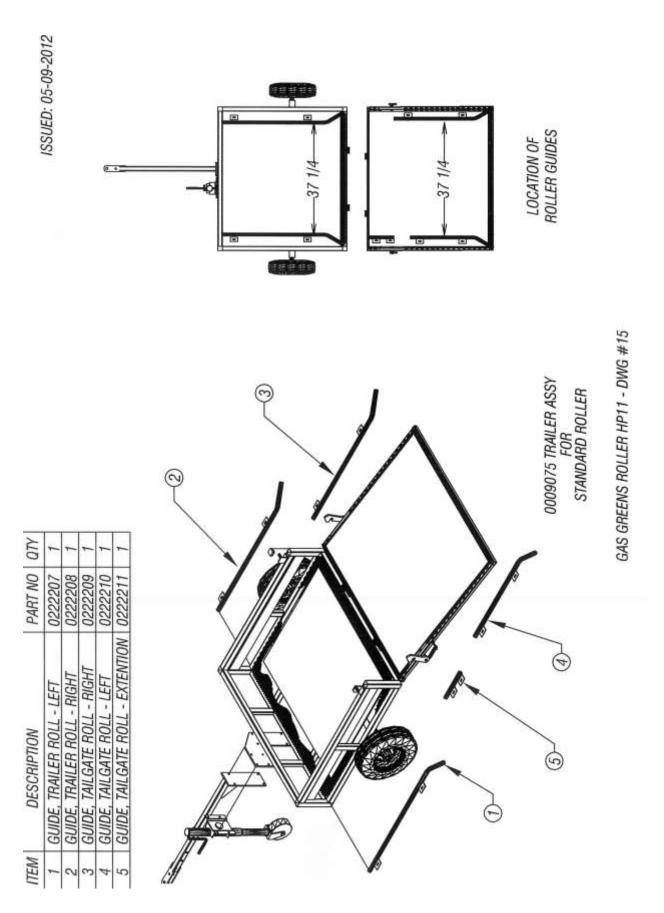

 $O:\Manuals\G.G.R.\ HP11\GGR_HP11_PW_11.7.13.doc\\ -22-$

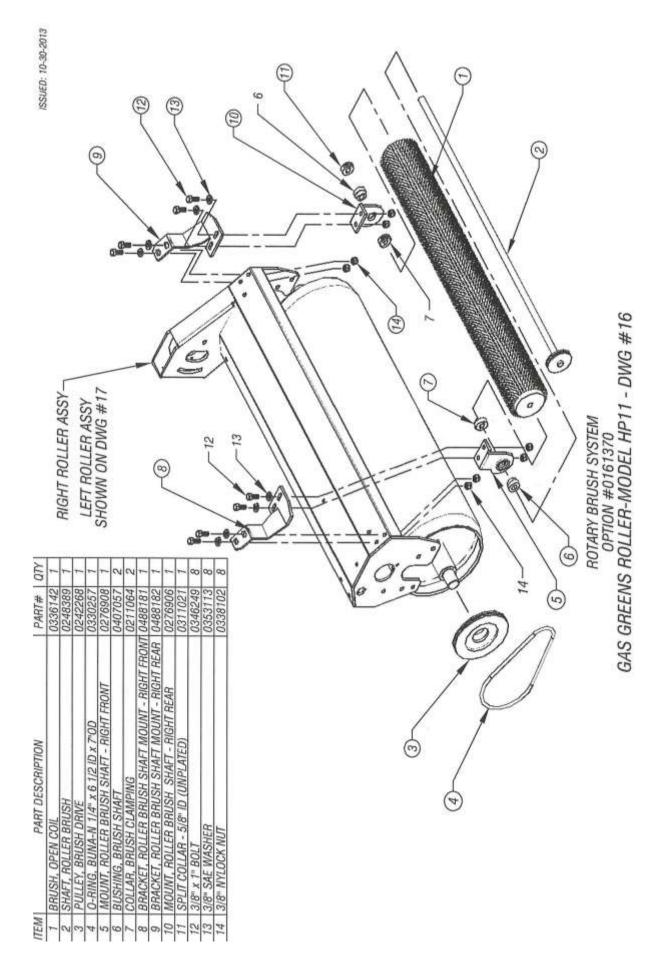

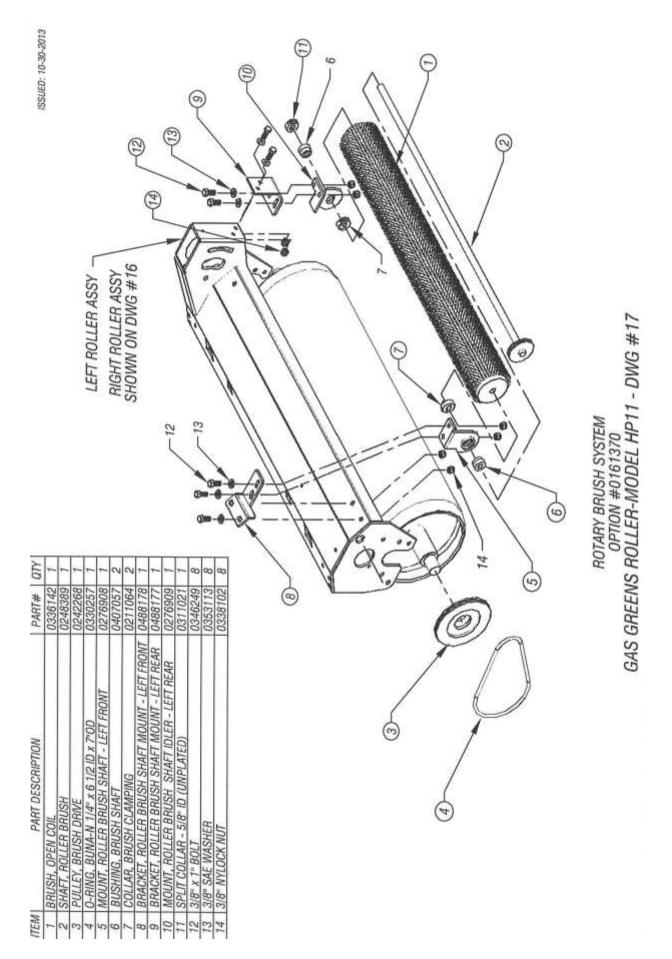

GAS GREENS ROLLER HP 11 - DWG #18


 $O:\Manuals\G.G.R.\ HP11\GGR_HP11_PW_11.7.13.doc\\ -25\ -$

Below is a quick reference chart for various "Flat Head Cap Screws" and the torque recommendations.

VALUES ARE STATED IN FOOT POUNDS

BOLT SIZE	Thds Per Inch	SAE Grade 5	SAE Grade 8
1/4	20	10	14
	28		
5/16	18	19	29
	24		
3/8	16	33	47
	24		
7/16	14	54	78
	20		
1/2	13	78	119
	20		
9/16	12	114	169
	18		
5/8	11	154	230
	11		
3/4	10	257	380
	10		
7/8	9	382	600
	9		
1	8	587	700
	8		

Drive Belt Tension Measurement by Deflection

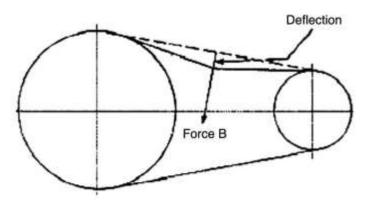

Deflection should be 3/8" when 8-12 lbs. push is applied at "B"

WARRANTY POLICY

Please remember to complete and return your Warranty Card and Dealer Delivery Report. Warranty Claims will not be considered if the Warranty Card and Dealer Delivery Report have not been returned to Salsco.

Your Salsco Commercial or Turf Equipment product is a commercial type product and is normally manufactured and sold for commercial or industrial use. Salsco will, for the original purchaser, for (5) years from the date of purchase (90 days if used for rental purposes) repair or replace, free of charge, any part or parts found to be defective in material, workmanship or both. Any transportation or shipping charges will be borne by the purchaser. If, during the warranty period stated above, the product does not function properly due to defect, simply contact Salsco and follow the Warranty Procedures included in this manual.

This warranty does not include:

- Incidental or consequential damages and is exclusive of any implied warranties.
- · Normal maintenance parts, including, but not limited to hoses, chains, belts, filters, lubricants, etc.
- Parts or components, which are covered under the original manufacturer warranty, including, but not limited to engines, pumps, and motors.

WARRANTY PROCEDURE

In order for Salsco to consider your warranty claims in a timely manner you must follow the simple procedures listed below:

MACHINE OR PART FAILURE

- a) Call our service department for helpful instruction on how to correct or repair the problem. Preventive maintenance will also be suggested.
- b) When ordering parts for Warranty issues, you MUST retain possession of the old parts in question until notified with respect to returning the parts to Salsco or other disposition.
- Warranty Claims MUST be filed within 30-days from completion of the work performed. Contact our office for an electronic warranty claim form.
- d) Fill in all information requested on warranty claim form, a copy of which is included in this manual, (date of purchase, company name, address, etc.). List all parts used. Make sure part numbers are correct. You can obtain these from your manual. (include good description of problem; i.e. "leaking from spool" rather than "leaking").
- e) It is our goal to consider and reach a disposition on each Warranty Claim within 30-days from the date that it is received. Therefore it is important that you respond promptly to any request for further information. Claims with no response to inquiries will be closed as "denied for lack of response" 90-days from the date of request.
- f) Email, Fax or Send Warranty Claim form to our Warranty Department. **Warranty on parts most often requires return of the parts that were replaced.** DO NOT DISCARD OLD PARTS UNTIL YOU HAVE RECEIVED A DETERMINATION AS TO WHETHER THESE PARTS MUST BE RETURNED.
- g) Our Warranty Department will contact and instruct you on how to return the Parts to Salsco on an RA #. Returns MUST be made within 30-Days from issuance of RA #. FREIGHT CHARGES ON RETURN OF PARTS IS THE RESPONSIBILITY OF THE CUSTOMER. Normal pre-delivery adjustments are not covered under warranty. Labor Warranties are based on reasonable time allowances as determined by Salsco, Inc. and paid at 75% of posted labor rate. TRAVEL TIME IS NOT REIMBURSED UNDER THE WARRANTY POLICY.
- h) Be sure to put the RA form inside the box that you are shipping back, also be sure to put on the outside of the box "Return of Goods" and the RA #.
- Ship returns via a traceable method such as UPS Ground Service. Be sure that the shipment is insured for the appropriate value. If uninsured parts are lost, we cannot issue a credit.

PLEASE NOTE: Warranty forms should be filled out completely.

PREVENTIVE MAINTENANCE IS YOUR BEST INSURANCE AGAINST EQUIPMENT FAILURE. BE SURE TO READ THIS MANUAL, ESPECIALLY THE MAINTENANCE, OPERATING AND CAUTION SECTIONS.

SALSCO, INC., 105 School House Rd. Cheshire, CT 06410 800-872-5726, 203-271-1682

203-271-2596 (Fax) sales@salsco.com, www.salsco.com

WARRANTY CLAIM FORM

SALSCO, INC. 105 School House Rd. Cheshire, CT 06410 Phone:(203) 271-1682,(800) 872-5726

Fax: (203) 271-2596 Email: s.clark@salsco.com Website: www.salsco.com

Date Submitted: END OWNER Work Order #: Phone: Name: Office Use Only Fax: Email: Date Rec'd Address: Cust ID: Salsco WC Salsco RA Date Approved: PURCHASED FROM Date Rejected: Phone: Name: Processed By: Fax: Email: Dir. Del Report on File: YES NO Address: Warranty Card on File: YES NO Part(s) Total: Labor Total: Equipment/Warranty Information (Must be complete) Total Approved: Date Failed: Invoice # Purchase Date: Repair Date: Approved/Rejected: Model #: Serial #: Name: Reason for Rejection: Primary Use: Hrs Used: Warranty Claim/Work Order#: Was a Salsco Return Authorization # issued for repairs or Suggested Preventative Maint: Return of Parts? Probable Cause of Failure: Work Performed/Comments on Repair: Submitted By: Shop Labor Rate: Printed Name: Total Labor Hours to Repair: Parts Required for repair Price Each | Total Inv# Qty. Salsco Part #: Description: \$ \$ \$ \$

Fill in all information requested on warranty claim form.

INCOMPLETE FORMS CANNOT BE PROCESSED & WILL BE RETURNED

List all parts used. Make sure part numbers are correct. Any parts that you believe to be defective or any parts that break should be retained for possible inspection until after the warranty has been paid or part has been replaced.

Salsco, Inc.

800-872-5726	72.0	Cheshire	ool House Rd e, CT 06410			@salsco.com	
203-271-2596 (Fa			271-1682			salsco.com	
MODEL.	DEAL	ER DEL	IVERY R	EPORT			
DEALER		CITY			STATE	ZIP	
PURCHASER (Last Name or Company)	(First Neme) (Middle Harrer)	ADDRESS		CITY	STATE	ZIP	
The undersigned dealer warrants carefully inspected, adjusted and p purchaser; that both the operation explained to the purchaser; and the were given to the purchaser and his operating instructions included in the	repared for delivery before del n and maintenance of the ma it a copy of the Owner's Instruct s attention called to Our Warrar	livery to the chine were tion Manual	above-describ a copy of the said Instruction	ed machine ha Owners's Instri n Manual and	certifies that the operation we been explained to him uction Manual and Our \ Caution Notes. I also make Salsco manuals a	r; acknowledges receipt Warranty Policy printed understand that it is n	of in πy
Date	Dealer		Date		Purchaser		_
				Sign By			_
Sign By				Phone			
Phone				Email			
							-
	FACTORY COPY WHITE	- DEALEK'S	S COPT TELLO	- OWNER	O COPT PINK		
SERIAL#					MODEL NO	ο.	
	SALSCO L	IMITED	WARRA	NTY CA	RD		
DATE PURCHASED);			-			
PURCHASER:							_
PURCHASER ADDI	RESS:						
EMAIL ADDRESS:							_
DEALER:							
DEALER ADDRESS	3:						
WILL THIS EQUIPM	ENT BE USED C	OMMER	CIALLY?		☐ YES		0
DID DEALER SERV	ICE THIS EQUIP	MENT A	ND INSTR	UCT YOU	J IN ITS CAR	E AND	
SAFE OPERATION	?				☐ YES		O
DID YOU RECEIVE	AN "OPERATION	SERV	VICE MAN	JAL AND	SAFETY PA	MPHLET?	
					☐ YES)
OTICE	SIGNED _						
	DD MUST DE EU	LED OUT	T OOME	TELV AN	Purchaser	THE EAST	DV
PORTANT: THIS CA WITHIN VOIDED	10 DAYS OF PUF						
WHITE - DEALE		YELLOW -	OWNER		CARD - FACT	ORY	

YELLOW - OWNER

SERVICE RECORD

If kept properly, this schedule will help track problems in the future.

					Total Hours
Date	Qty.	Part #	Description of Work Done	Hours Used	to Date
			,		
			The state of the s		
-					
				ļ	
				<u> </u>	
.,					
		L		1	

MODEL #	S/N		
		DATE PURCHASED:	